



Catalogue
CATERING
Chapter
DISHWASHING

Model
AD-505 SOFT 230V 1N 50Hz

19029102

DIMENSIONS

	Article		Packed	
Lenght	600	mm	660	mm
Depth	630	mm	745	mm
Height	830	mm	1030	mm
Weight	70,000	kg	81,000	kg
Volume	0,299	m3	0,506	m3

ELECTRICITY

Electric power	3,40	kw
Voltage	230V -1N	
Single-phase 230V wiring	2 X 2,5 + T - 20A	
Three-phase 230V wiring	3 X 4 + T - 25A	
Three-phase +N 400V wiring	4 X 2,5 + T - 16A	
Frequency	50	hz

PLUMBING-WATER

Water consumption	54,00	l/hr
Pressure	Water Press:100-400kPa(1-4bar)	

LEVEL SOUND

65,00 db

DISHWASHER AD-505 SOFT

Front loading dishwasher - EVO Generation - Advance range.
Hourly production: 60 baskets/hour - 1080 dishes/hour.
Clearance (max ware height): 380 mm.
Valid for GN trays.
Wash cycles: 60"" - 120"" - 180"".
SOFT : Built-in descaling unit and timer for regeneration cycle.

Made of stainless steel.
Full Double skin body to isolate machine's noise from the environment.
The door has double skin with special pressed isolation material, and stamped finishing to improve noise isolation and to keep the heat inside the machine.
Rock counterbalanced door. Double spring and stainless steel hinge system.
The case allows the placement of the machine under surfaces of 850 mm height.

Double rotating wash and rinse systems, above and below, made of stainless steel.
Tray filters on the tank, made of AISI-304 stainless steel.
Wash pump: 600 W.
Rinse pump: 260 W. Air break system.
Drain pump: 30 W. Drainage cycle.
Tank with 0.8 kW heating element.
Tank capacity: 14 litres.
Boiler with adjustable power: 1.8 / 2.8 / 3.7 / 5.6 kW.
Boiler capacity: 7 litres.
Water consumption: 2.4 litres/rinse.
Thermostatic temperature control: washing at 60 °C and rinsing at 90 °C.
Thermo stop system that guarantees minimum rinsing temperature of 85 °C.
Security thermostats.
Built-in automatic rinse dispenser and detergent doser.
Safety magnetic switch for door opening.
Adjustable legs.
Water protection rating: IPX5

Total power: multipower 2.4 ÷ 7.0 kW.

Baskets equipment: 1 x CT-10, 1 x CP-16/18 and 4 cutlery containers."




Catalogue
CATERING

Chapter
DISHWASHING

Model
AD-505 SOFT 230V 1N 50Hz

19029102

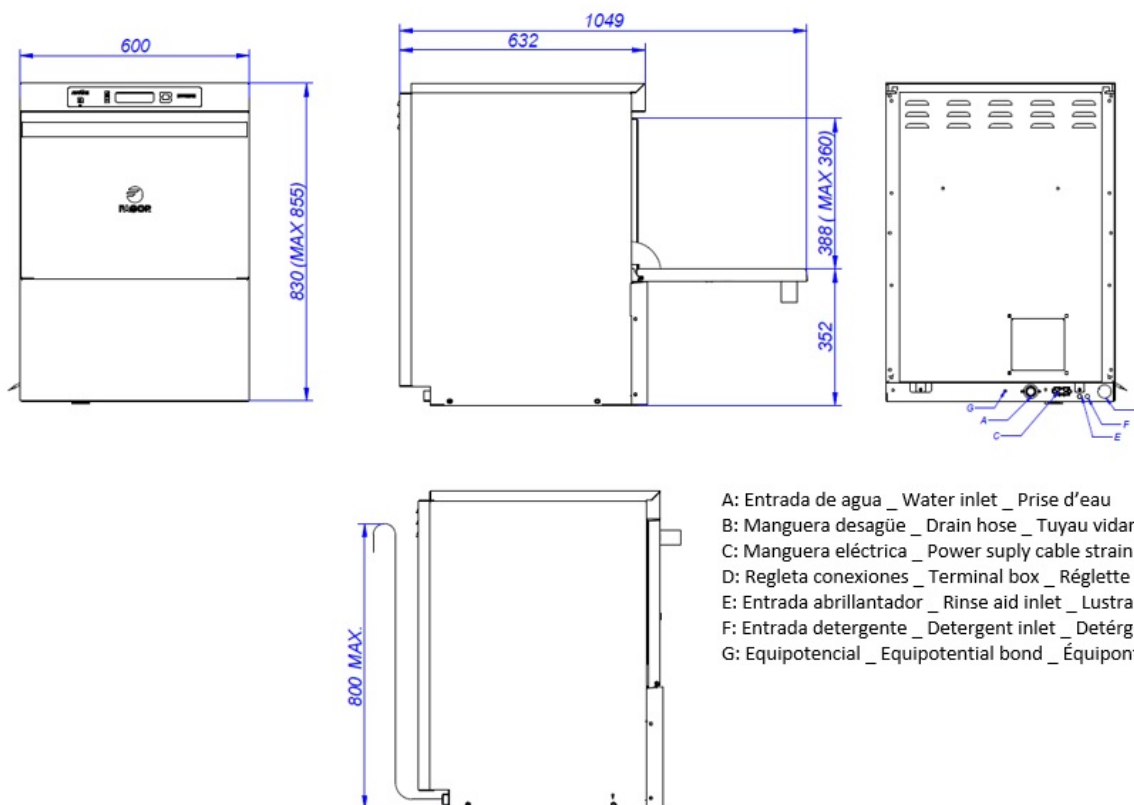

- A: Entrada de agua _ Water inlet _ Prise d'eau
- B: Manguera desagüe _ Drain hose _ Tuyau vidange
- C: Manguera eléctrica _ Power supply cable strain relief _ Gaine électrique
- D: Regleta conexiones _ Terminal box _ Réglette raccordement
- E: Entrada abrillantador _ Rinse aid inlet _ Lustrant entrée
- F: Entrada detergente _ Detergent inlet _ Détérgent entrée
- G: Equipotencial _ Equipotential bond _ Équipotentialité