



Catalogue
CATERING

Chapter
DISHWASHING

Model
CCO-120 I ECO 380...415V 3N 50Hz

19046991

DIMENSIONS

	Article		Packed	
Lenght	1180	mm	1530	mm
Depth	790	mm	955	mm
Height	1560	mm	1950	mm
Weight	211,000	kg	305,000	kg
Volume	2,091	m3	2,849	m3

ELECTRICITY

Electric power	10,90	kw
Voltage	380...415V	-3N
Three-phase 230V wiring	3X4+T	- 32 A
Three-phase +N 400V wiring	4X4+T	- 25 A
Frequency	50	hz

PLUMBING-WATER

Water consumption	210,00	l/hr
Pressure	Water Pres:200-400kPa(2-4bar)	

CONVEYOR DISHWASHER CCO-120 I ECO

All the main parts are manufactured in AISI-304 anti-corrosion stainless steel: tanks, washing and rinsing arms, rinsing jets, doors, basket conveyance system and metal tubes.

Upwards-opening double panel door.

Tank tray filters made of AISI-304 stainless steel, easy to access and remove for cleaning and access to the tank.

Safety filter for pump suction.

Easy access for installation. Electrovalve located on one side (no need to remove panels to connect the machine).

Electrical panel designed for easy connection of dosers for liquid and solid detergents, rinse aid, limit switches, supplementary emergency stop button.

Washing arms easily removable as a set, for cleaning, with a plug on each branch providing access for cleaning inside.

Rinse jets easily dismountable and removable.

System of electronic regulation of speeds by means of frequency shifter.

Configurable electronic temperature control:

- Wash (50 - 65 °C)

- Rinse (70 - 85 °C)

Guarantor of rinse at 85 °C.

The ECO version pass-through dishwashers are fitted with an external hot water generator, gas heated, model GWB-40 (*).

The generator replaces the electric rinse boiler in the dishwasher, bringing a significant saving in electricity consumption.

Given the heating power of the generator, the dishwasher can be installed in facilities with a cold water connection.

The dishwasher has a motor pump to send the water from the generator to the rinse jets.

The dishwasher incorporates a flow regulator to ensure constant water consumption.

The first filling of the dishwasher wash tank takes place with water from the generator, rapidly reaching the set temperature.

Pressure regulator for flow control.

Emergency stop button incorporated.

Extra anti-entrapment protection system at the entrance, mounted on the AS-260 splash guard supplement (optional).

Open door blocking system.

IPX4 protection system.

System for detection of blockage of conveyor carriage and automatic reverse function.

High-power washing system with 4 upper and 4 lower washing branches.

3 washing programs: deep, medium and high capacity.

Double effect rinse.

Energy-saving system: reduces consumption by halting operation of the pumps, and by passing the heating of the rinse to stand-by mode (70 °C).

Auto-timer which deactivates the conveyor motor after a pre-set period



FAGOR INDUSTRIAL

Catalogue
CATERING

Chapter
DISHWASHING

Model
CCO-120 I ECO 380...415V 3N 50Hz

19046991

of inactivity (10 minutes).

Energy saving system in the wash: the wash does not start up until it detects the passage of the basket.

Rinse saving system. The rinse stops when the basket has left, saving water and energy.

Model prepared for entrance of baskets from the left side.

Gas heating power: 48 kW.

Equipment included:

2 base baskets, CT-10

2 baskets for plates CP-16/18, 1 basket for glasses CV-16/105, 1 basket for cutlery CT-10 R

Limit switch included.





Catalogue
CATERING

Chapter
DISHWASHING

Model
CCO-120 I ECO 380...415V 3N 50Hz

19046991

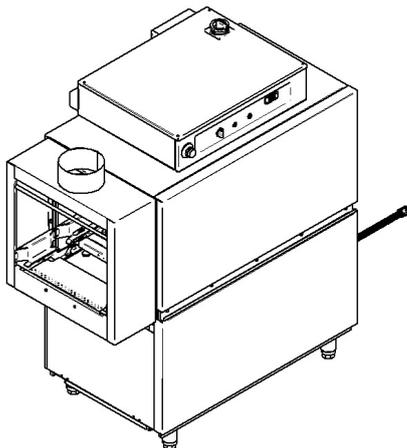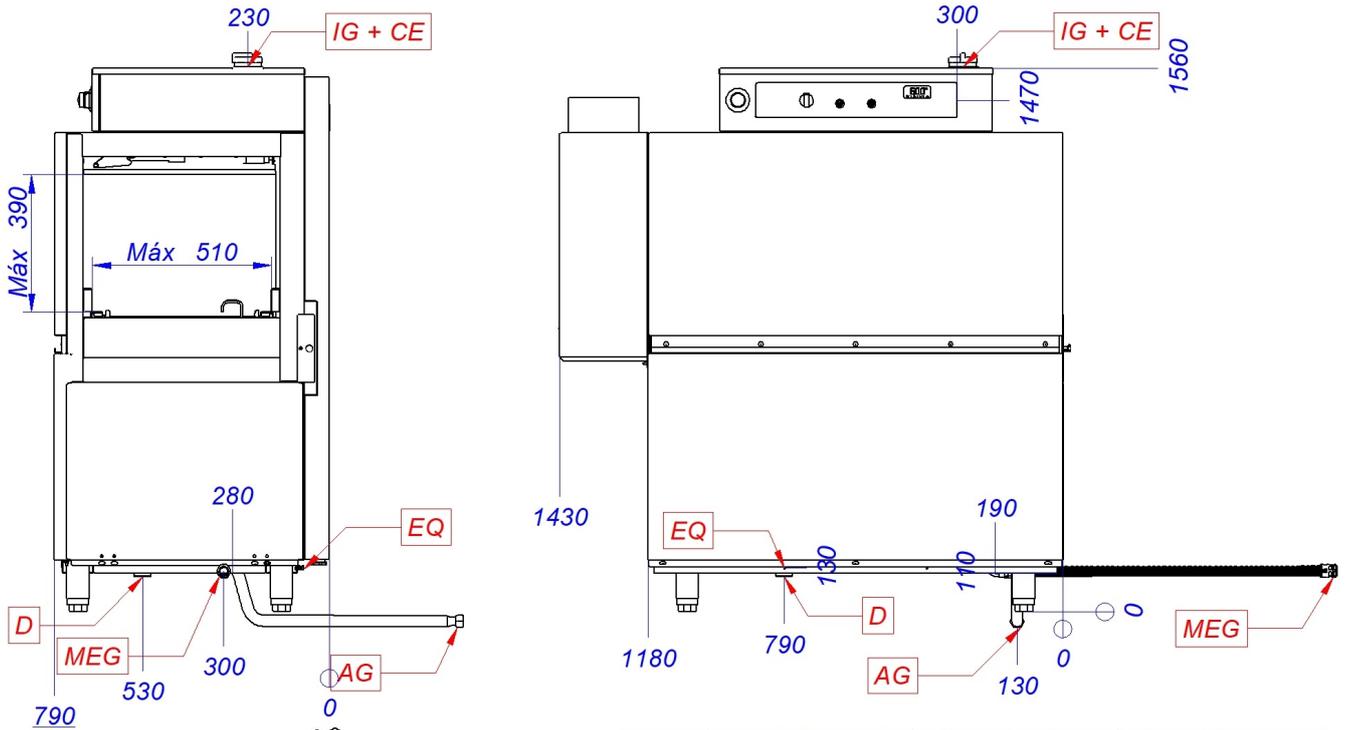

AG	Conexión hidráulica del generador	Gas booster hydraulic connection	Connexion hydraulique de la chaudière à gaz
CE	Alimentación eléctrica	Power supply	Connexion électrique
D	Desagüe	Drain	Vindage
EQ	Toma equipotencial	Equipotential bonding terminal	Connexion Équipotentielle
IG	Interruptor general	General switch	Interrupteur général
MEG	Conexión eléctrica del generador	Gas booster electric connection	Connexion électrique de la chaudière à gaz