



Catalogue
FOOD SERVICE
Chapter
COOK & CHILL

Specific model
CW-101-E R SW 400V 3N 50/60Hz

19073625

07/07/2022

DENOMINATION:

iKORE ovenConcept (digital) DirectSteam (injection)with intelligent washingfor 10 trays GN 1/1 electric heating right opening

DESCRIPTION :

FUNCTIONS:

- 2.8" screen with rotary knob and push function for configuring and confirming inputs
- iClima:
 - . Humidity management and control by means of direct measurement with a humidity sensor
 - . 10% regulation capacity- Fagor Recipe Center
- Fagor Recipe Center:
 - . 100 factory preset and culinary tested recipes
 - . Storage capacity for more than 100 9-stage recipes
- Air and water cool-down (rapid cabinet cooling function)
- Cooking modes: low temperature steam 30-98°, steam 99°, super steam 100- 130°, mixed 30-300° and convection 30-300°
- Chamber dehumidification for crispy roasts
- Delta cooking

DIRECTSTEAM:

- Steam generation by injecting water into the turbine, atomising the water and converting it into steam.


CONTROLS:

- Languages: 5
- Ability to configure screen tone, volume and contrast.
- Tone: 8
- Power, network, language and system settings.
- SAT and Trade fair mode

EQUIPMENT FEATURES:

- Stop/start function
- EZ-Sensor. Internal probe with 4 measuring locations
- Positioning aid for temperature sensor
- Manual steam injection
- Automatic humidification system
- Variable humidification with 5 levels
- 6 programmable air circulation speeds (from 1400 rpm to turbine stop)
- Option to switch from °C to °F
- Display of actual values and selected values
- Delayed programming
- Ability to select 1/2 power
- Automatic humidification system
- Automatic dehumidification system
- Automatic adaptation to the characteristics of the installation site (altitude, etc.) including initial self-testing
- Automatic boiling point adjustment
- Removable fan cover
- Integrated turbine brake for increased safety
- HA-Control (indirect combustion, does not pass through the oven chamber)
- Auto-reverse system for reversing fan rotation
- Double-glazed, ventilated cooking chamber door
- Special heat-reflective coating and hinged inner panes for easy cleaning
- LED lighting in the cooking chamber
- HOLD-OPEN DOOR systems (3 locking positions for greater user safety)
- Proximity contact door switch

DIMENSIONS



X Width	898 mm	X Gross width	980 mm
Y Depth	817 mm	Y Gross depth	953 mm
Z Height	1117 mm	Z Gross height	1340 mm
Net Weight	140,0 kg	Gross Weight	171,0 kg
Net volume	0,820 m3	Gross volume	1,251 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Engine power	0,60 kW
Electric power	18,600 kW
Amperage (A)	27,7A
Heating power	18,00 kW
Voltage	380-415V - 3N
Electric frequency	50/60Hz

WATER TECHNICAL SPECIFICATIONS

Pressure	H2O: 200-400kPa(2-4bar)
Water max consumption	10,00 L/h

CONNECTIONS TECHNICAL SPECIFICATIONS

230 V three-phase wiring	3X6MM ² +T-32A
Single-phase 230V wiring	2X10MM ² +T-50A
Three-phase +N 400V wiring	3X2,5MM ² +N+T-20A
Water inlet diameter	3/4"
Drain 1 diameter	40

OTHERS

Door opening	Right
--------------	-------

TECHNICAL FEATURES

Number of trays	10
-----------------	----





Catalogue
FOOD SERVICE
Chapter
COOK & CHILL

Specific model
CW-101-E R SW 400V 3N 50/60Hz

19073625

07/07/2022

- Easily replaceable gasket insert
 - Interior and outer material: AISI 304 stainless steel (interior mirror polished)
- CERTIFICATION AND INSTALLATION SYMBOLS:**
- EC declaration of conformity
 - EC declaration of gas conformity
 - CB safety
 - IPX5 protection against splashes and jets of water
 - Height adjustable equipment feet (all except 0623)
 - Monitor App <(>&< Maintenance App (self-diagnosis of warnings and errors)
 - Logging App:
 - . Cycle history
 - . Error history

WASHING SYSTEM:

- iWashing (environmentally efficient)
- Choice of iWashing Solid or iWashing Liquid smart washing systems
- Washing programmes:
 - . 1 basic cleaning programme (spray)
 - . 3 automatic cleaning programmes
 - . 1 rinsing programme
 - . 1 polishing programme
- Indication of cleaning status and remaining time

SPECIFIC OPTIONS :

- ELECTRIC POWER : 400V 3N 50/60HZ - 101
- FUSE DENITINION : 101 E
- BRAND : FAGOR
- GAS POWER : NOT APPLY
- OPENING DOOR : R RIGHT
- WASHING SYSTEM : SW IWASHING SOLID
- SHOWER : NO
- TROLEY : NOT APPLY
- HINGING RACK : GN TRAY
- SOUS VIDE : NO
- IOT : NO
- CERTIFICATE : CE
- WRAS : NO WRAS

POSSIBLE ACCESSORIES :

- COOK & CHILL
- CONVERSION KITS
- CLEANING ACCESSORIES
- SPECIFIC FOR 061 AND 101
- SPECIFIC FOR 061 AND 103
- COOKING ACCESSORIES O
- STACKING SET
- SUPPORTS OVENS
- STRUCTURES AND TROLLEYS
- FASTENING KIT
- THERMICAL COVER
- PASTRY GUIDES
- VARIOUS
- KIT BAFFLE






Catalogue
FOOD SERVICE
Chapter
COOK & CHILL

Specific model
CW-101-E R SW 400V 3N 50/60Hz

19073625

07/07/2022

101- BOILER / INJECTION RIGHT DOOR INTELLIGENT WASHING

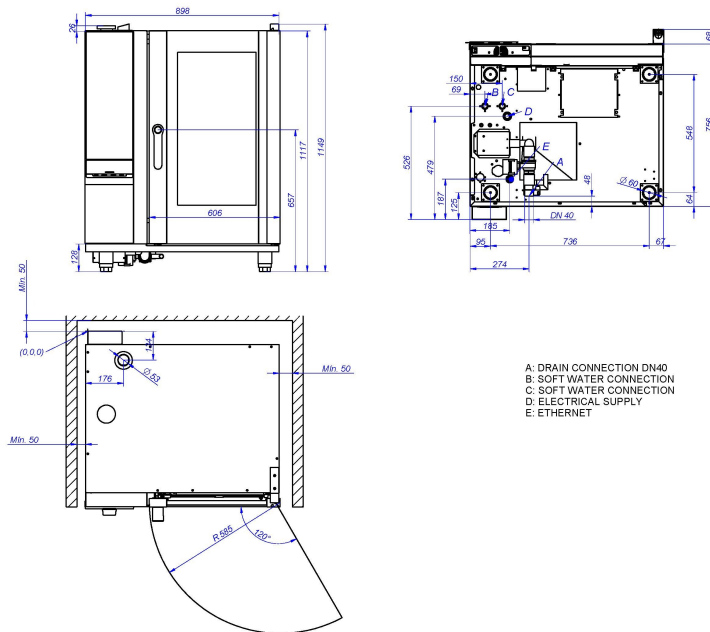

101- BOILER / INJECTION LEFT DOOR INTELLIGENT WASHING

